

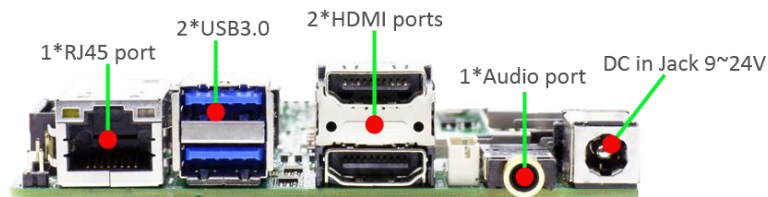


1. Intel® Haswell i5-4300U SoC Processor
2. Support 2 * SO-DIMM DDR3L 1333/1600 up to 16 GB
3. Support 1 * Serial ATAIII (6Gb/s) Device
4. Integrated Realtek ALC662 HD Audio CODEC with 2-CH
5. 2 * HDMI1.4 ports
6. Support Intel® i218LM Gigabit PHY LAN
7. 3 * USB3.0, 2 * USB2.0
8. Support slim Fan design
9. +9~24V Wide range DC-in PWR jack
10. NUC Form Factor (101 * 101mm)

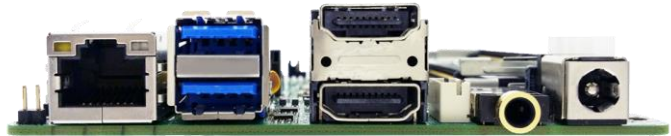

Intel®
Haswell-U
Broadwell-U
Processor

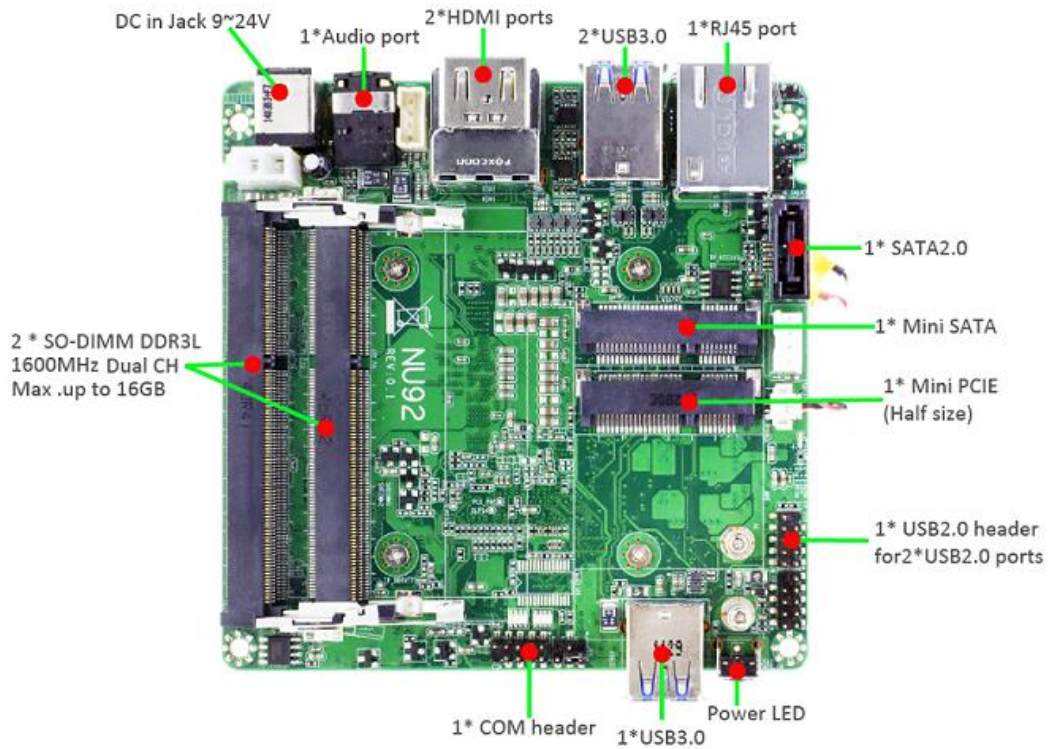

Product Specifications	
Form Factor	
Dimensions	- NUC (101 * 101 mm)
Processor System	
CPU	- INTEL® Haswell i5-4300U SoC Processor
Core Number	- 4300U: 2
Max Speed	- 4300U: 2.9GHz
L2 Cache	- 4300U: 3MB
Chipset	- SoC
BIOS	- AMI 128Mb Flash ROM
Expansion Slot	
Mini-PCle	- 1 (half size)
mSATA	- 1 (full size)
Memory	
Technology	- Dual Channel DDR3L 1333/1600 MHz SDRAM
Max.	- 16 GB
Socket	- 2 * SO-DIMM
Graphics	
Controller	- Integrated Intel® HD Graphics
VRAM	- Shared Memory
HDMI	- 2 (Max. Resolution: 4096 * 2304@24Hz)
MultiDisplay	- Yes (Dual Display)
Ethernet	

Ethernet	- 10/100/1000 Mbps
Controller	- Intel® 218LM GbE
Connector	- 1 * RJ45
SATA	
Max Data Transfer Rate	- 1 * SATAIII (6.0Gb/s)
External I/O	
HDMI	- 2
Ethernet	- 1
USB	- 2 * USB 3.0 (rear), 1 * USB3.0 (front)
Audio	- 1 (Line-out W/SPDIF-out)
Internal Connector	
USB	- 2 * USB 2.0
Serial	- 1 * RS232/422/485
SATA	- 1
mPCIe	- 1 (half size)
mSATA	- 1 (full size)
Chassis intrusion	- 1
Audio Amplifier Header	- 1
AT mode jumper	- 1
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	- +9~24V DC-In (2-pin PWR Con)
Power On	AT/ATX Supported - AT: Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0°C – 60°C
	- Storage: -20°C – 85°C

- For further information please visit the website at <http://www.jetway.com.tw>
- The Specification may be changed without further notice.

Product Accessories				
Parts	SATA cable	SATA Power cable		
P/N	G01-SATAL-RD30-F	G01-XH4-SA15-35F		